



SEE NOTE (1).

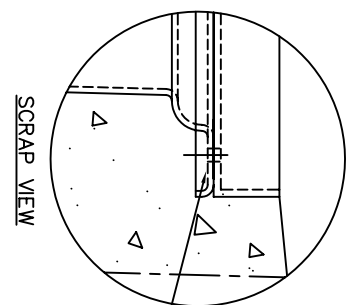

SCRAP VIEW

IMPORTANT TO TRANSFER ANY COVER LOADS THROUGH TO BACKFILL i.e. CONCRETE TO BE FREE OF ANY VOIDS UNDER G.R.P. TOP FLANGE.

SURROUNDING FLOOR SLAB SHOULD HAVE AN ADEQUATE FALL TO ALLOW WASTE WATER TO RUN INTO SILT TRAP

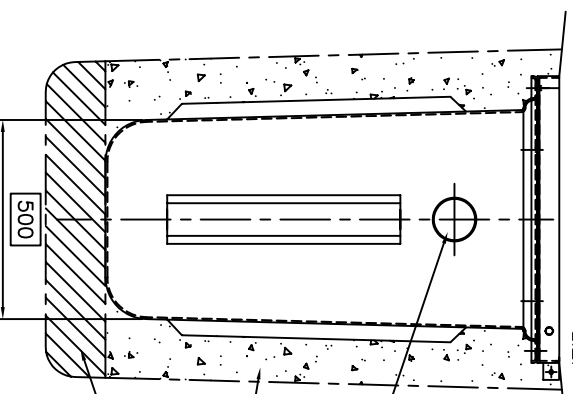

110 (4") UPVC. OUTLET PIPE.
 CONCRETE BACKFILL BY CLIENT TO SUIT SITE CONDITIONS
 CONCRETE BASE SLAB CAST BY CLIENT TO SUIT SITE CONDITIONS.

ALL DIMENSIONS ARE IN MILLIMETRES - DO NOT SCALE

TITLE

CAR WASH
 SILT TRAP
 CST1H (c/w COVER)
 CUSTOMER DRAWING

SCALE 1:10 D.O. REF. A2

DRAWING No. DS0714P ISSUE 3

- NOTES:-
- 1.) GALVANISED MESH COVERS, DESIGNED TO FACTA 'B' LOADING - 5 TONNE SMWL.
 - 2.) VOLUMES.
TOTAL VOLUME = 1150 Litres.
 - 3.) TOTAL UNIT WEIGHT = 240kgs (EMPTY).

ISSUE	DATE	DRAWN	MODIFICATION
3	02/06/10	T.K.	CC896
2	30/10/09	P.T.C	CS274
1	10/12/08	J.C	INITIAL ISSUE

This drawing is copyright and may not be reproduced or used without the written permission of Kingspan.
 KINGSKAN RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE

