


NOTES:-

- 1.) STANDARD INLET/OUTLET PIPES ARE PVCU UNDERGROUND DRAINAGE TO BS4660 WITH SEALS.
- 2.) THIS DRAWING SHOULD BE USED FOR DIMENSIONAL INFORMATION ONLY. REFER TO INSTALLATION GUIDELINES

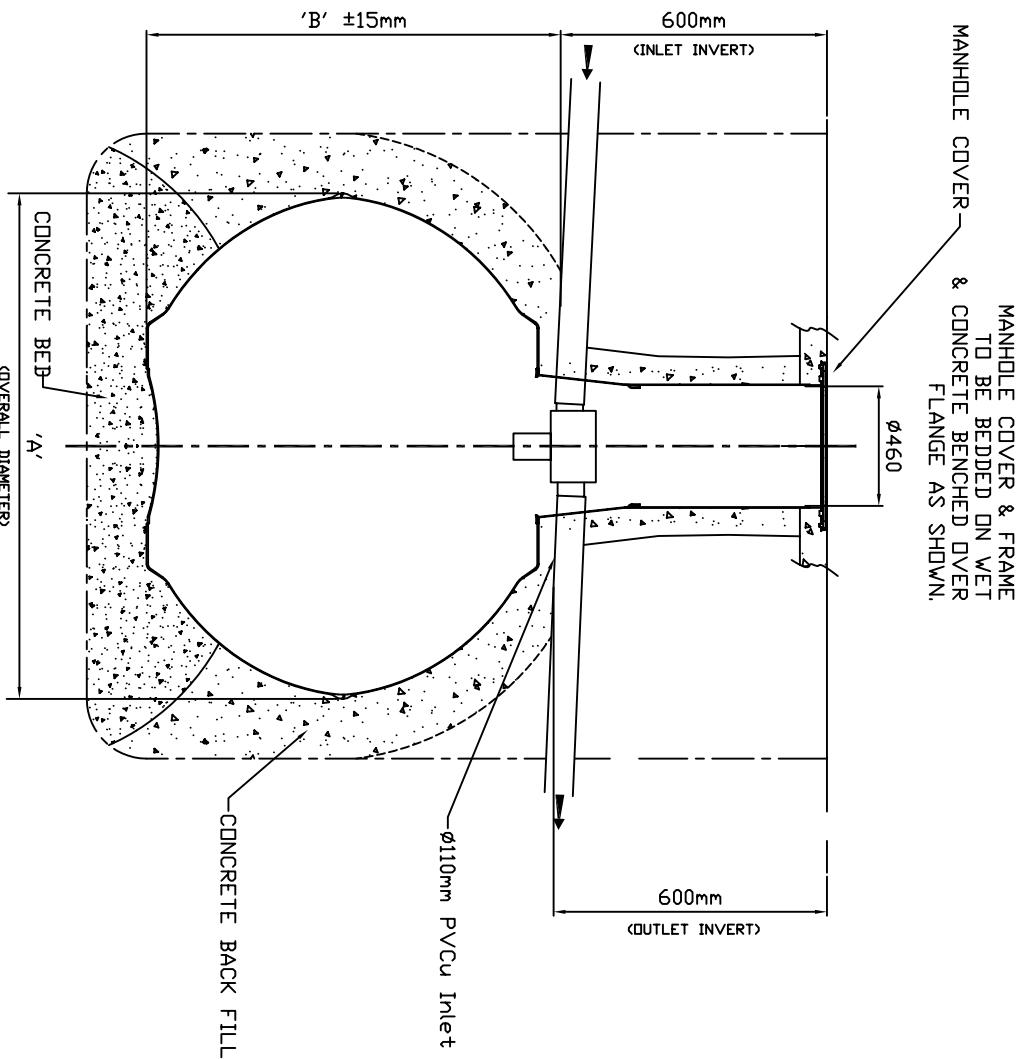

CAPACITY	DIMENSIONS		WEIGHTS	COVER & FRAME
	'A' ϕ	'B'		
LITRES			Kg	
2800	2070	1540	125	CFL600T
3800	2070	1760	180	CFL600T
4600	2080	1925	210	CFL600T

ISSUE	DATE	DRAWN	MODIFICATION
02	21.02.11	T.K.	CC945 – Ref. 2800L Tank Dim 'A' Updated
01	13.01.09	JC	CC541 & CC668

This drawing is copyright and may not be reproduced or used without the written permission of KINGSPAN
 KINGSPAN RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE

ALL DIMENSIONS ARE IN MILLIMETRES – DO NOT SCALE

Kingspan
 Environmental

RAIN TRAP TANK
 INSTALLATION
 DRAWING

DRAWING No. DS0793P 02